
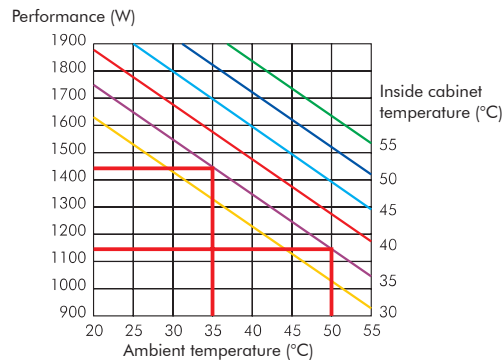


## AVC 145



Features	Unit	AVC145.00	AVC145.01	AVC145.10	AVC145.11	AVC145.20	AVC145.21
Power supply	V/Hz	230V/1ph/50-60		115V/1ph/50-60		400V/1ph/50-60	
Dimensions HxWxD	mm	800x400x240					
Cooling capacity EN814 A35A35	W	1450/1500					
Cooling capacity EN814 A35A50	W	1150/1200					
Air flow rate (free blow)	inside	m3/h					
	outside	m3/h					
Max current	A	4.5/4.6		9.3/9.1		2.25/2.4	
Delayed fuse	A	16		20		16	
Absorbed electric power EN814 A35A35	W	850/590					
Absorbed electric power EN814 A35A50	W	990/1050					
Refrigerant (type/charge)	kg	R134a/0,7					
Maximum Pressure	bar	25					
Operating temperature (ambient)	°C	+20/+55					
Operating temperature (enclosure)	°C	+20/+45					
Temperature controller (factory set at 35°C)	-	Integrated mechanical thermostat	Integrated digital thermostat	Integrated mechanical thermostat	Integrated digital thermostat	Integrated mechanical thermostat	Integrated digital thermostat
Compressor type	-	Rotative compressor					
Noise level	dB(A)	65					
Electrical connection	-	Three-pole connector					
Protection degree EN60529/1 enclosure inside	-	IP54					
Protection degree EN60529/1 ambient inside	-	IP34					
Weight (with packaging)	Kg	40(41)		52(53)+			
Colour	-	RAL 7035					
Conformity/Certifications	-	CE					

### Accessories

Door limit switch	FINCOR
Door limit switch with mechanical lock	FINRIP
Flashing safety device	FSL
Flow diverter*	FD145

